


Current Sensor

Product Series: SHK-VBS-T7-S2

Part number: SHK-VBS-T7-600-S2
SHK-VBS-T7-700-S2

Version: Ver 1.3

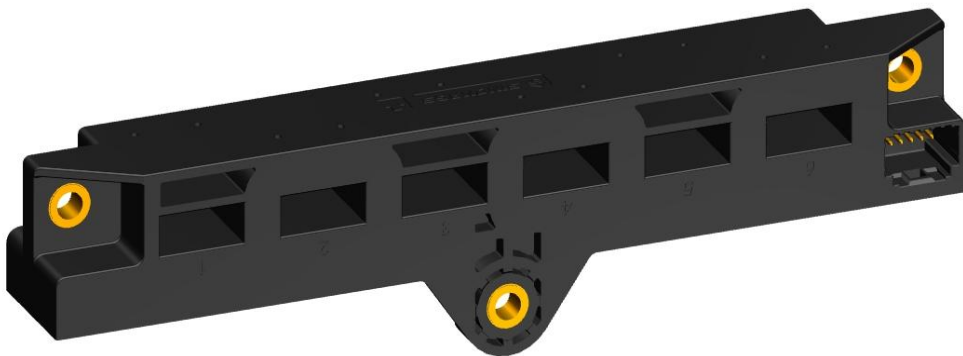

CONTENT

1. Description	2
2. Electrical data	3
3. Dimension & Pin definitions	5

1. Description

The SHK-VBS-T7-S2 current sensor is based on Hall and open-loop design. It is suitable for DC, AC pulsed and any kind of irregular current measurement under the isolated conditions.

Typical applications

- AC Variable speed drives
- Inverter
- Electric welder power supply
- Switched model power supplies (SMPS)

General parameter

Parameter	Symbol	Unit	Value
Working temperature	T_a	°C	-40 ~ 125
Storage temperature	T_{stg}	°C	-40 ~ 125
Mass	m	g	255

Absolute maximum rating

Parameter	Symbol	Unit	Value
Supply voltage	V_{cc}	V	-0.5 ~ 8 (Not operating)
			-0.5 ~ 6.5
Electrostatic discharge voltage	$U_{ESD\ HBM}$	kV	8

Remark: the unrecoverable damage may occur when the product works on the conditions over the absolute maximum ratings. Long-time working on the absolute maximum ratings may cause the degradation on performance and reliability.

Isolation parameter

Parameter	Symbol	Unit	Value	Comment
Insulation voltage	U_d	kV	2.5	RMS voltage for AC test 50Hz-1 min
Insulation resistance	R_{INS}	MΩ	500	DC 1000V, ISO 16750
Clearance distance (pri. -sec)	d_{Cl}	mm	4.2	Shortest distance through air
Creepage distance (pri. -sec)	d_{cp}	mm	4.2	Shortest path along device body
Comparative tracking index	CTI		PLC 3	
Case material			V0 according to UL 94	

Selection Guide


Product	Channel range	Channel range
SHK-VBS-T7-600-S2	±300 A: OUT - 4、5、6	±600 A: OUT - 1、2、3
SHK-VBS-T7-700-S2	±400 A: OUT - 1、2、3	±700 A: OUT - 4、5、6

2. Electrical data

 Condition: $T_a = 25^\circ\text{C}$, $V_{CC} = 5.0\text{ V}$

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary current measuring range	I_{PM}	A	-300		300	SHK-VBS-T7-600-S2
			-600		600	
			-400		400	SHK-VBS-T7-700-S2
			-700		700	
Supply voltage	V_{CC}	V	4.75	5	5.25	All
Current consumption	I_{CC}	mA		90	120	@ $V_{CC} = 5.0\text{ V}$
Output voltage	V_{OUT}	V	$(V_{CC}-5) \times (V_{off} + G \times I_{PM})$			@ $T_a = 25^\circ\text{C}$
Quiescent voltage	V_{off}	V		2.5		@ $T_a = 25^\circ\text{C}$, $V_{CC} = 5.0\text{ V}$
Sensitivity	G	mV/A		6.67		$I_{PM} = \pm 300\text{A}$
				3.33		$I_{PM} = \pm 600\text{A}$
				5		$I_{PM} = \pm 400\text{A}$
				2.85		$I_{PM} = \pm 700\text{A}$
Load resistance	R_L	k Ω	10			
Ratiometricity error	ϵ_r	%		± 0.5		@ $4.75\text{V} \leq V_{CC} \leq 5.25\text{V}$
Sensitivity error	ϵ_G	%		± 1		@ $T_a = 25^\circ\text{C}$
Electrical offset voltage error	V_{OE}	mV		± 2.0		@ $T_a = 25^\circ\text{C}$, $V_{CC} = 5.0\text{ V}$
Magnetic offset voltage error	V_{OM}	mV		± 7.0		@ $T_a = 25^\circ\text{C}$, $V_{CC} = 5.0\text{ V}$
Ave. Temp. coefficient of V_{OE}	TCV_{OEAV}	mV/ $^\circ\text{C}$		± 0.04		@ $-40^\circ\text{C} < T_a < 125^\circ\text{C}$
Ave. Temp. coefficient of S	TCS_{AV}	%/ $^\circ\text{C}$		± 0.02		@ $-40^\circ\text{C} < T_a < 125^\circ\text{C}$
Linearity error	ϵ_L	% I_P		± 1		of Full range
Response time	T_r	μs		2	6	@ 90% of I_{PM}
Frequency bandwidth (-3 dB)	BW	kHz	40			No RC circuit
Output voltage noise	V_{no}	mVpp			20	@ DC ~ 1 MHz

Total error(mV)

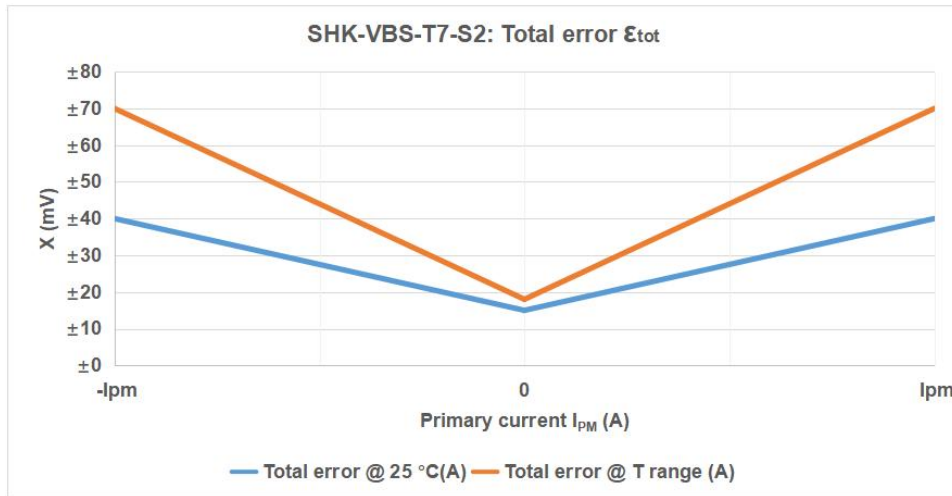

Total error specification				
I_{PM} (A)	@ $T_a=25^{\circ}\text{C}$, $V_{CC}=5.0\text{V}$		@ $-40^{\circ}\text{C} \leq T_a \leq 125^{\circ}\text{C}$, $V_{CC}=5.0\text{V}$	
-I _{PM}	40mv	±2%	70mv	±3.5%
0	15mv	±0.75%	18mv	±0.9%
I _{PM}	40mv	±2%	70mv	±3.5%

3. Dimension & Pin definitions

